



PARTY TENT 900 - 1.000 CM



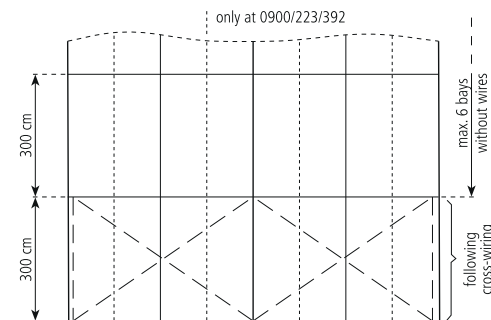
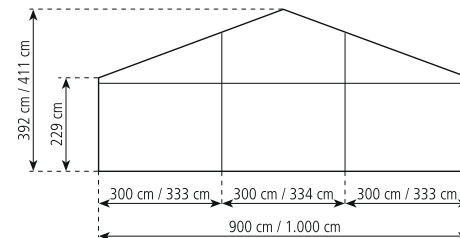
TECHNICAL DATA

STANDARD VERSION

Span	900 cm	1.000 cm
Side height	229 cm	229 cm
Ridge height	392 cm	411 cm
Roof pitch	20°	20°
Bay distance / grid	300 cm	300 cm
Main profile	94 x 48 x 3 mm	94 x 48 x 3 mm
Gable uprights	2	2

Max. wind speed according EN	80 km/h	
Special version	<ul style="list-style-type: none"> · Elimination of anchoring by installation of a steel-aluminum floor with ballast or use of the compact floor or use of the cassette floor with ballast · Elimination of wind cross-wiring by installation of portals 	
Further extension possibilities	Octagonal with intermediate fields single and on both sides	
Flooring	<ul style="list-style-type: none"> · Wood floor with timber or steel-aluminum substructure · Cassette floor · Compact floor 	
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204	

PARTY TENT 900/229/392 & 1.000/229/411



QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Röder team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.

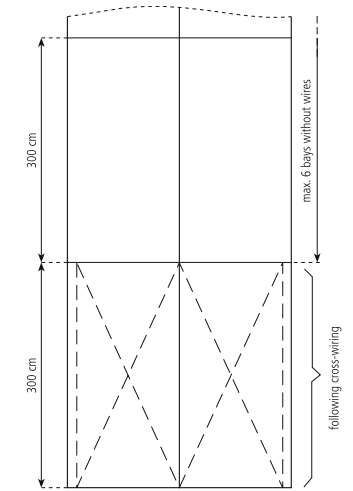
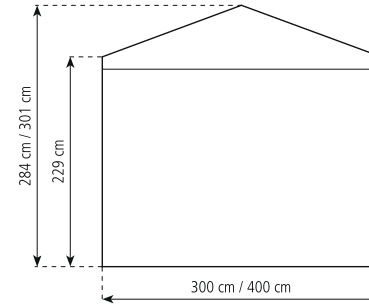
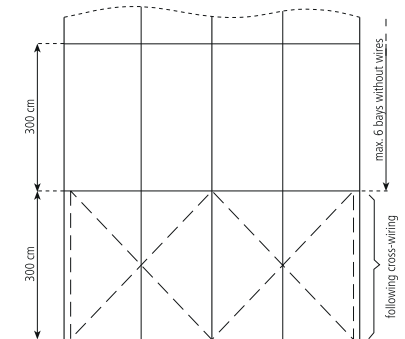
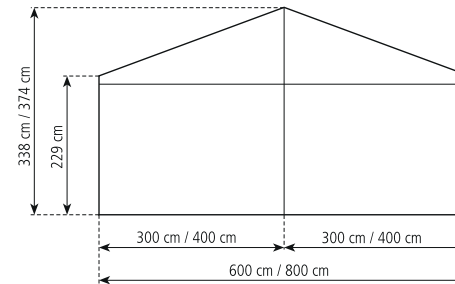


PARTY TENT 300 - 800 CM

TECHNICAL DATA
STANDARD VERSION

Span	300 cm	400 cm	600 cm	800 cm
Side height	229 cm	229 cm	229 cm	229 cm
Ridge height	284 cm	301 cm	338 cm	374 cm
Roof pitch	20°	20°	20°	20°
Bay distance / grid	300 cm	300 cm	300 cm	300 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	81 x 48 x 3 mm or optional 94 x 48 x 3 mm
Gable uprights	0	0	1	1

Max. wind speed according to EN	80 km/h
Special version	<ul style="list-style-type: none"> · Elimination of anchoring by installation of a steel-aluminum floor with ballast or use of the cassette floor with ballast · Elimination of wind cross-wiring by installation of portals
Further extension possibilities	· Hexagonal with intermediate fields on both sides
Flooring	<ul style="list-style-type: none"> · Wood floor with timber or steel-aluminum substructure · Cassette floor · Compact floor
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204

PARTY TENT 300/229/284 & 400/229/301

PARTY TENT 600/229/338 & 800/229/374

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Röder team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.